

# LED badge instructions

## 1.Badge model

Type	Specification	Size	Weight	Colour
HD-NT44R	44*11 pixel	93X28X9.7mm	23g	RED
HD-NT44B	44*11 pixel	93X28X9.7mm	23g	BLUE
HD-NT44G	44*11 pixel	93X28X9.7mm	23g	GREEN
HD-NT44Y	44*11 pixel	93X28X9.7mm	23g	YELLOW
HD-NT44W	44*11 pixel	93X28X9.7mm	23g	WHITE
HD-NT44P	44*11pixel	93X28X9.7mm	23g	PURPLE

## 2. Interface Description



① Brightness adjustment, long press this button to adjust the brightness, brightness levels down in turn, to 100%, 60%, 20%, the pine hand to save the current set brightness.

Short press - click the button to switch the next program


② Switch, up→ off,down→ on.

③ Communication and charging, using the USB data line to connect the computer, change the display content through the software; connect the 5V, 1A (with the regular phone charger) can be charged.


## 3.Software HDSmart instructions

1) The data line is connected to the computer. In my computer, the mobile disk will be found. After entering, the files will be copied to the local disk. Then double-click the HDSmart.exe icon to start the installation software..


2) After the installation is completed, select the badge screen size "44 \* 11".

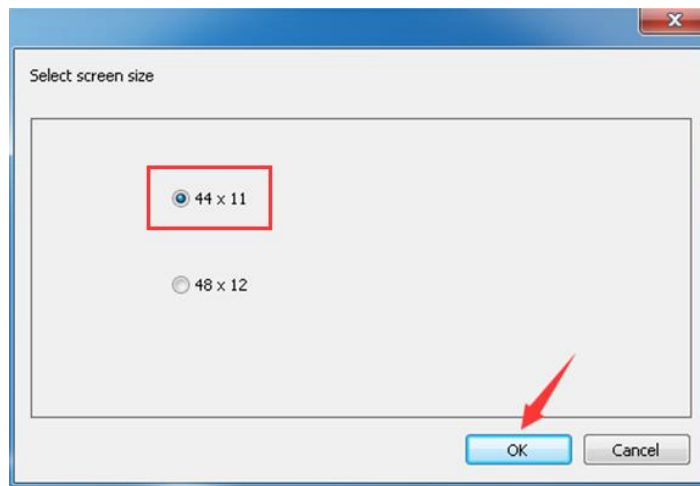

3) Edit text.

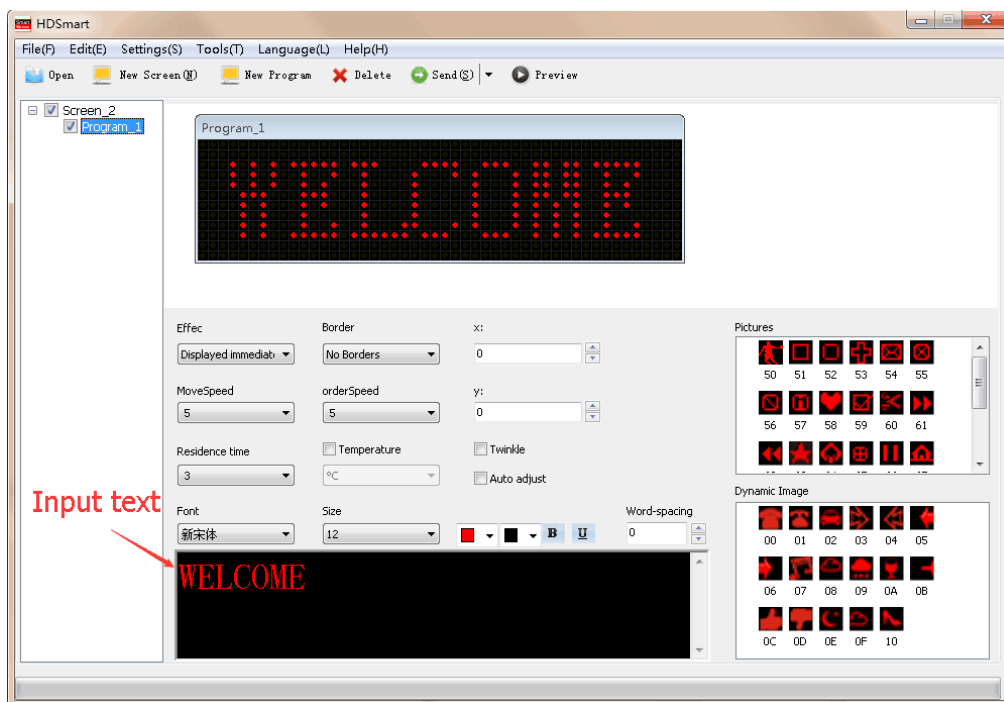

4) After editing the content, send.

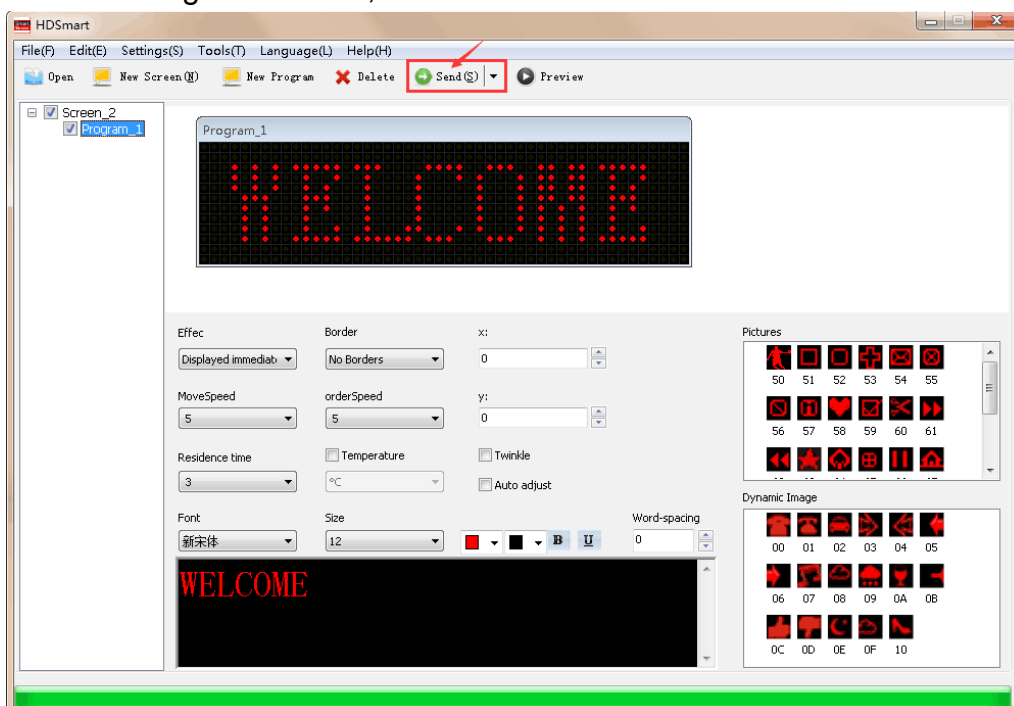


Click [Send], there is a green progress bar below the software. Sent successfully, the badge can display the content.

#### 4. Creat several screens

Click [New Screen], you can create a new screen.



Right-click the screen, select [Rename], you can rename different screens to distinguish multiple screens.

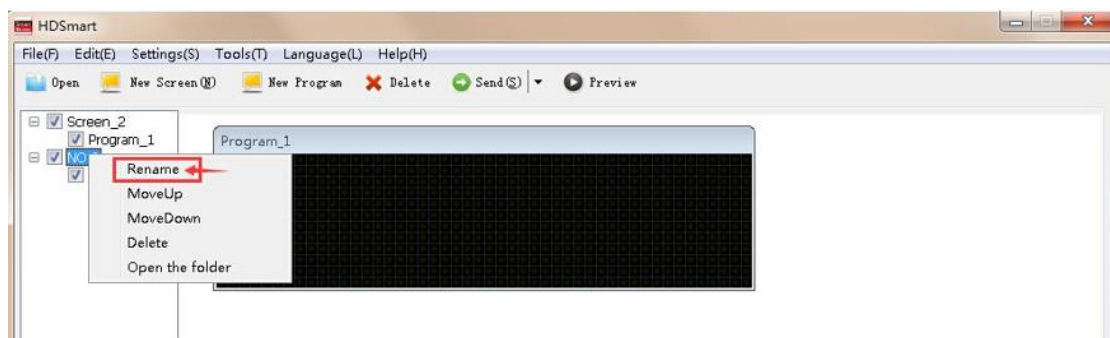

#### 5.Create multiple programs

Click [Create New Program], you can add a new program. As shown below, program\_1, program\_2 and program\_3 are played in turn.



#### 6.Other parameters

- 1) battery power: lithium battery 230mAh, charging 1.5 hours, battery life 12hours;
- 2) Charging power supply: 5V, 1A (with conventional cell phone charger);
- 3) Working temperature: -10°C-50°C;
- 4) Interface languages: Chinese, English, Turkish, Persian, Russian, French, German, Thai, Mongolian, Polish, Korean, Japanese, Spanish, Vietnamese;

5) Screen: You can build multiple screens, send different content to different badges;

6) Program: 10 programs, about 2 thousand Chinese characters, 4 thousand English (32Byte) support temperature.

## 7. HDSmart Software Download link :

- [http://huidu-cn.oss-ap-southeast-1.aliyuncs.com/HDSmart\\_V3.7.exe](http://huidu-cn.oss-ap-southeast-1.aliyuncs.com/HDSmart_V3.7.exe)

- [http://download.huidu.cn/download/HDSmart\\_V3.7.exe](http://download.huidu.cn/download/HDSmart_V3.7.exe)

## 8. Technical support :

Skype: tina.li925

Email: [2851017780@qq.com](mailto:2851017780@qq.com) , [2851017779@qq.com](mailto:2851017779@qq.com)

## 9. Common Problems and Solutions

A. Send program pop-up small window "screen does not match"



**Solution:** click screen parameter settings, select the correct screen size.

B. Send program pop-up small window "device not found"



**Solution:** Change another USB data cable.

C. When press the side swith " 1 & 2 " at the same time, "upgrade" will appear on screen, it means the name badge will enter the upgrade process and unable to send out message.



**Solution:** Upgrade the firmware .