


PIN ASSIGNMENT

P1	P2
1	1. RED 24AWG
2	2. WHITE
3	3. GREEN
4	4. BLACK 24AWG
SH	SH

SEE "TABLE A"

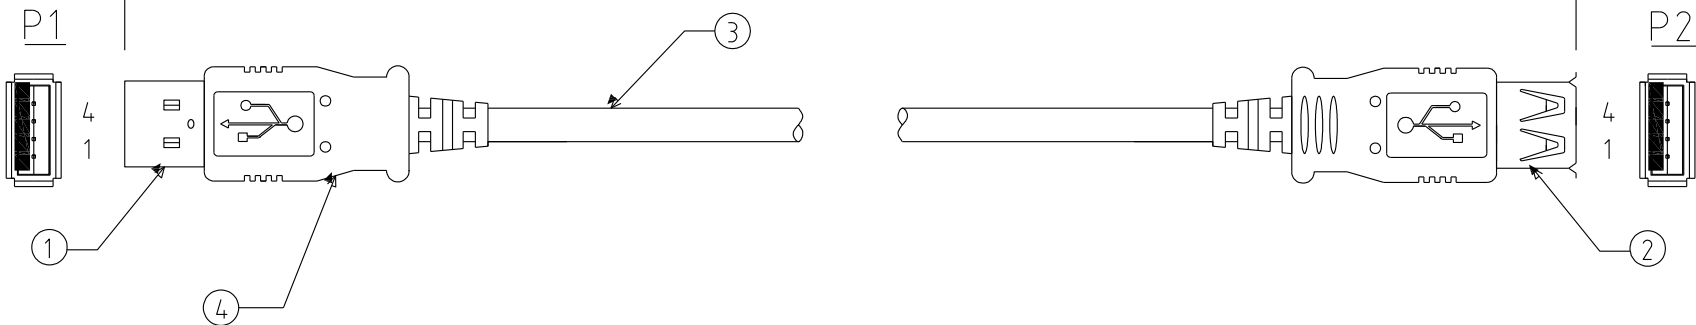

6			UNLESS OTHERWISE SPECIFIED		TITLE:	CABLE ASSY		
5			CABLE TOLERANCE			USB 2.0, "A" MALE		
4	BEIGE PVC MOLDED HOOD	1				- "A" FEMALE		
3	USB 2.0, UL2725 ONE TWISTED PAIR 28AWG + 2 C 24AWG, O.D 4.5, BEIGE PVC JACKET	A/R	LENGTH +/- 3%			OCP PART NO.: SEE "TABLE A"		
2	USB A FEMALE CONNECTOR, GOLD PLATING, USB 2.0	1			SCALE: NTS	DATE: 07/19/13	CUSTOMER:	
1	USB A MALE CONNECTOR, GOLD PLATING, USB 2.0	1			UNITS: MM	CHK'D: OA	SIZE	DRAWING NUMBER:
ITEM	DESCRIPTION/REMARKS	QTY	CONNECTOR TOLERANCE		DRAWN BY:	APP'D: OA	A	REV
			.XXX# LINEAR				A	1
			.XX# LINEAR					1